

OROFLEX



APLICACIONES

- Air compressors for road and construction work
- Compressors for drilling machinery
- Pumping of high performance liquids
- Applications requiring very high resistance to abrasion

CHARACTERISTICS

Colour: Yellow.


Composition: Synthetic rubber and Polyester-Polyamide textile.

Surface: Fine ribbed, highly resistant to abrasion.

Service Temperature: >From -20 °C to + 80 °C

Standard Length: 60 m (up to 200 m to order).

WATER SERVICE PRES.	= 5 / 3	AIR SERVICE PRES.
---------------------------	---------	-------------------------

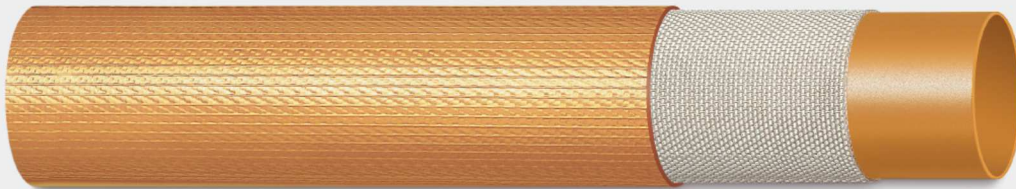

Code	Nominal diameter		Wall thickness mm.	Weight/ metre gr.	AIR Service/Bursting Pressure bar	Traction limit for no tearing Kg	Curvature radius mts
	mm.	Inches					
01200	19	3/4	2,5	180	20 / 160	300	0,250
-	19	3/4	3,5	230	20 / 160	300	0,250
01201	27	1	3,5	235	20 / 100	750	0,250
-	27	1	4	275	20 / 100	750	0,250
01203	38	1 1/2	3,5	440	15 / 75	1.200	0,650
01204	45	1 3/4	3,5	520	15 / 75	1.400	0,750
01205	52	2	3,5	650	10 / 50	1.500	1,200
*01208	65	2 1/2	4	750	10 / 50	2.050	1,250
01206	76	3	4	950	10 / 50	2.600	1,300
01207	102	4	4	1.275	10 / 50	3.780	1,700
*01208	127	5	4	1.800	10 / 50	5.980	1,970
*01209	152	6	4	2.100	10 / 50	7.280	1,970
*01210	204	8	4,5	2.550	10 / 50	9.320	2,250